
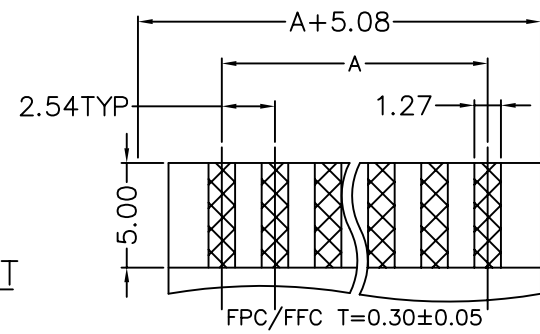
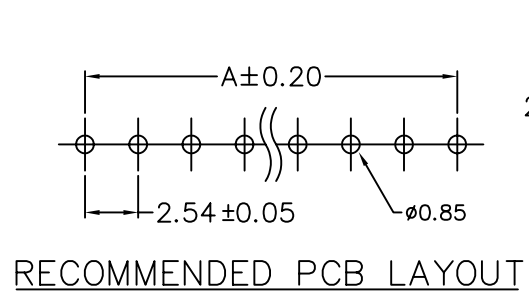


Material
 Insulator: Glass-Reinforced Thermoplastic.
 Contact: Phosphor Bronze.
 Plating: Tin Plated over Nickel.

Specification
 Voltage Rating: 250 VAC RMS.
 Current Rating: 1 Amp.
 Dielectric Withstanding Voltage: 1000 VAC RMS 60 Hz.
 For 1 Minute.
 Insulation Resistance: 5000 Megohms Min AT 500 VDC.
 Contact Resistance: 25 Milliohms Max.
 Durability: 20 Cycles.

Environmental
 Temperature Range: -40°C TO +85°C.

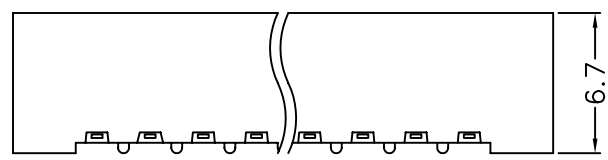

Circuit	Dimension			Circuit	Dimension		
	A	B	C		A	B	C
2	2.54	8.43	10.54	15	35.56	41.45	43.56
3	5.08	10.97	13.08	16	38.10	43.99	46.10
4	7.62	13.51	15.62	17	40.64	46.53	48.64
5	10.16	16.05	18.16	18	43.18	49.07	51.18
6	12.70	18.59	20.70	19	45.72	51.60	53.72
7	15.24	21.13	23.24	20	48.26	54.15	56.26
8	17.78	23.67	25.78	21	50.80	56.69	58.80
9	20.32	26.21	28.32	22	53.34	59.23	61.34
10	22.86	28.75	30.86	23	55.88	61.77	63.88
11	25.40	31.29	33.40	24	58.42	64.31	66.42
12	27.94	33.83	35.94	25	60.96	66.85	68.96
13	30.48	36.37	38.48	26	63.50	69.39	71.50
14	33.02	38.91	41.02	27	66.04	71.93	74.04

FFC NON ZIF RIGHT ANGLE 2,54 mm

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10
PART No. FPCXXR2		MEI		
DRAWING No. FPCXXR2		CHECKED BY BECKY		
		DRAWING BY TCF		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE